

Revival|7043T

Modular

Product Specifications

Construction	Patterned loop
Backing	Nexus® Modular
Dye Method	Solution dyed
Fiber Type	Apex SDP® Polyester
Fiber Weight	16 oz.
Pile Density	6275
Product Size	24X24
Gauge	1/10
TARR	3.0

Specifications & Tests

Indoor Air Quality	GLP2526
Pill Test	Passes
Flooring Radiant Panel	Class 1 (ASTM E-648)
Smoke Density	Less than 450 (ASTM E-662)
Static Test	Less Than 3.5 kv (AATCC-134)
Lightfastness	Passes

Installation Methods

Installation Methods	Ashlar, Brick, Monolithic, Quarter Turn, Non-Directional
----------------------	--

Warranties

Lifetime Nexus® modular dimensional stability

Lifetime against delamination

Lifetime performance for wear

Lifetime stain removal


Lifetime colorfastness to light and atmospheric contaminants

Lifetime for tuft bind strength (edge ravel, yarn pulls, zippering)

Lifetime fiber performance for static



Colorways

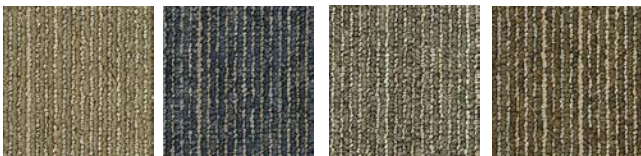


2211

2212

2213

2214



2215

2216